

A Primer for Every Job...

Recommended Applications	B-I-N	1-2-3	Cover-Stain	AllCoat
INTERIOR SURFACES				
Drywall	E	E	F	E
Plaster (1)	G	E	G	E
Limewash/Lime Plaster	NRENRE			
New Wood Trim/Doors	E	G	F	E
Plywood	G	G	F	E
Brick	NRENRR			
Concrete (1)	G	E	G	G
Galvanised New (3)/Old	NRENRG			
Aluminium/Stainless Steel	G	E	G	G
Plastisol®	E	E	F	E
Fibreglass/GRP	NRENRR			
Glossy Paints/Glass	E	E	F	E
Varnish/Woodstain	ENRRNR			
Clear Finishes	E	G	G	G
Wood Panelling/Laminates	E	G	G	G
Ceramic Tile	G	E	G	G
Formica®	E	G	G	G
Wallcovering (non porous)	E	E	F	E
Powder Coatings	E	E	F	E
Acoustic Tiles	NREE			
EXTERIOR SURFACES				
Cedar & Redwood	*	G	F	*
Plywood	*	G	F	*
Pressure Treated Wood	*	E	F	*
Brick	*ENR*			
Concrete/Stucco	*	E	G	*
Glossy Paints/Glass	*	E	F	*
Galvanised New (3)/Old	*ENR*			
Aluminum/Stainless Steel	*	E	G	*
Wrought Iron/Cast Iron/Copper	*NRE*			
Lead/Asbestos	*ENR*			
PVC	*	E	G	*
Powder Coatings	*	E	F	*
STAINS & ODOURS				
Tannin Bleed	E*NREE*			
Knots & Sap	E*NRNRNR			
Rust	E*EGG*			
Smoke & Fire Damage	E*NREE*			
Water Damage	E*NREE*			
Nicotine/Tobacco	GNREE*			
Mildew/Mould Stains (2)	E*NREE*			
Pet Stains	E*NREE*			
Asphalt/Grease	E*ENRRNR			
Tar/Bitumen	NRENRRNR			
Creosote	E*GNRRNR			
Odour Sealing	E*NRNRNR			
Lipstick/Crayon	E*EGG*			

E=Excellent (best recommendation)
G=Good (may be used on this surface)
NR=Not Recommended

NOTES: * Use B-I-N for spot priming on exterior surfaces
1) Allow new plaster/cement & stucco to cure 60-90 days before coating.
2) Use Blackfriar Fungicidal Wash to remove mould/mildew before priming.
3) Degrease new galvanised steel with methylated spirit before priming.

READ INSTRUCTIONS ON PRODUCT CONTAINER FOR FURTHER INFORMATION

Other ZINSSER Problem Solvers...



Bulls Eye 1-2-3® All Surface, All Purpose Water-Base Primer

- Great hide
 - Great adhesion without sanding
 - Superior stain blocking
 - Mould & mildew resistant film
 - Great for high pH surfaces
 - Great under or over any paint
 - Fast 1 hour recoat time
- * Available in Bulls Eye® 1-2-3 DEEP TINT formula to improve coverage of deep colour topcoats



Bulls Eye 1-2-3® DEEP TINT Water-Base Deep Tint Primer-Sealer

- Interior and exterior
- Tintable to mid-to-deep colours
- Seals and tones the surface
- Improves coverage of deep colour topcoats
- Use under or over any oil or water-base paint
- Recoat in 1 hour




COVER STAIN® Oil-Base Primer-Sealer Stain Killer Bond Coat

- Interior and exterior
 - Blocks cedar & redwood bleed
 - Use for fire, smoke & water damage
 - Sticks to all surfaces without sanding
 - Fast drying – recoat in 2 hours
- * 350 VOC Formula



Allcoat Stain Killer Multi-Surface Primer & Finish

- High Hiding Stain Blocker
- Oil performance without the odour
- Kills stains from water, graffiti, ink, crayon
- Sticks to all surfaces without sanding
- Non-yellowing, dries flat, sands easily
- Dries in 30 minutes. Recoat in 2 hours

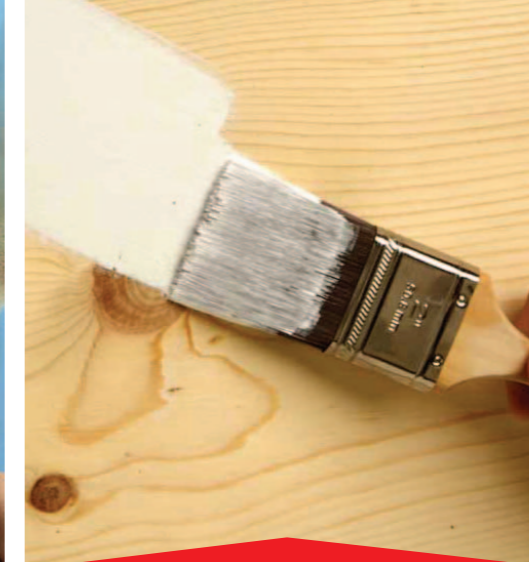

B-I-N® Shellac-Base Interior & Spot Exterior The Ultimate Performance Primer-Sealer



The ultimate stain killer - blocks stains from water, smoke, fire damage and more
The ultimate new wood sealer - seals knots & sap streaks
Blocks odours permanently and completely
Sticks to glass, metal, tile and other glossy surfaces without sanding
Lightning fast dry - recoat in 45 minutes
Great under or over any topcoat
Available in a handy 390ml aerosol



www.zinsseruk.com

An RPM Company



The Ultimate Performance Shellac-Base Primer-Sealer Stain Killer



The Ultimate Performance Primer

Since 1946, professionals have turned to B-I-N to seal the worst stains and block the worst odours. Today - almost 60 years later - it's still the ultimate performance primer. B-I-N has a unique shellac-base formula that gives it unsurpassed stain killing power - the power to block stains from severe water damage, fire damage and more. It's the best primer for sealing interior wood and is the "go to" primer for spot priming knots and sap streaks inside and outside. Known for its legendary adhesion and lightning fast dry time, B-I-N is also the only primer that blocks odours from fire, smoke and mould & mildew permanently and completely.

Great for Interior Applications

B-I-N is great for priming all interior surfaces - new wood, drywall, plaster, masonry, metal, PVC and more. It seals the surface - even porous surfaces - providing a great base coat and excellent enamel holdout for paint and decorative finishes. B-I-N sticks to all surfaces - even glossy, dense and hard-to-paint surfaces - without sanding and blocks even the darkest colour paint in just one coat. It dries in minutes, is ready to recoat in just 45 minutes and fully cures faster than any water or oil-base primer or paint. Use B-I-N with confidence under or over any latex or oil-base paint.




Lightning Fast Dry Time

B-I-N dries to the touch in about 15 minutes and is ready to recoat in 45 minutes - faster than any other conventional primer. How does B-I-N do it? Its unique alcohol solvent evaporates quickly with no residual odour so you can get to painting faster.



Best Wood Sealer

B-I-N is the ultimate wood sealer. It seals new wood and is great for sealing knots and sap streaks that bleed through ordinary primers and paints. Great for interior woodwork and trim, B-I-N can also be used as an exterior spot primer on knots, rust stains and other hard to cover wood surfaces.

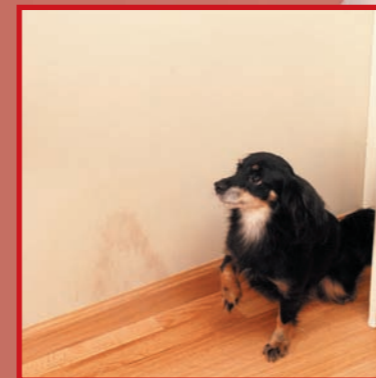

The Ultimate Odour Sealer

No other primer can duplicate the odour sealing properties of shellac-base B-I-N. It blocks strong, persistent odours permanently and completely - odours from fire and smoke damage, nicotine, fireplaces, mould & mildew and more! And, it's great for sealing the musty odours in old furniture, the formaldehyde odours in new pressboard cabinets - even odours from pet stains.

The Choice of Restoration Professionals

The "go to" primer for disaster restoration, B-I-N blocks and seals stains from fire, water and smoke damage in just one coat. And its shellac-base formula has natural odour-blocking properties that permanently and completely seal odours better than any man-made substance.



Excellent Stain Killing Power

B-I-N is the ultimate stain killer. Just one coat will block the toughest stains. It seals in stains from water, grease, oil, soot, rust, mildew, tannin bleed, graffiti - even crayon and lipstick - and prevents them from bleeding through the topcoat.



Legendary Adhesion to All Surfaces

B-I-N sticks to everything - even smooth, dense, hard-to-paint surfaces like glossy paint, varnish, ceramic tile, PVC and Formica® - without sanding or deglossing. It's the perfect primer for refinishing kitchen cabinets or wood panelling. It bonds to the surface and cures fast to provide a firm anchor for topcoats so they won't chip, peel or blister.

Low Temperature Application

Because of its unique alcohol and shellac-base formula, B-I-N is the only primer-sealer that can be applied in below-freezing temperatures - down to 0°C F. B-I-N is the perfect primer for cold weather projects and unheated environments.



GENERIC TYPE: Pigmented, shellac-base primer sealer

RECOMMENDED FOR: Interior

New and previously painted drywall, cured plaster/cement based coatings, wood (pine, fir, cedar, redwood, plywood, previously varnished or woodstained), metal (aluminium, steel, copper), vinyl, fiberglass, cured masonry (stucco, concrete block, poured concrete, brick). Blocks stains and odours resulting from water & fire damage, seals stains from dark colours, grease, rust, creosote, asphalt, crayon, lipstick, graffiti, markers, knots, sap streaks, tannin bleed, etc.

Exterior

Spot prime persistent bleed from knots and sap streaks before full-surface priming with water or oil base primer.

APPLICATION DATA:

Brush, roller or pad:

Natural bristle or lambskin

Airless Spray:

.011" - .013" tip @ 800 - 1200 psi

Conventional Spray:

Spray @ 45 - 55 psi

Practical Spread Rate:

12.5 m² per litre

Application Conditions:

-18°C - 32°C / 85% RH

Dry Time (24°C / 50%RH):

Touch: 15 - 20 min.

Recoat: 45 min.

Stain sealing: 45 min.

Full scrape cure: 1 - 3 days

Tinting:

Up to 16ml of universal colourant per litre

CLEANUP:

Clean application tools with methylated spirit, allowing wet brush or roller to soak for 5-10 minutes. Dried tools require overnight soaking in methylated spirit.

TECHNICAL DATA:

Solids by weight: 52.5%

Solids by volume: 30.0%

Density: 1.2 kg/l

Viscosity Range: 53 - 65 KU

Theoretical Spread Rate

@ 1 mm DFT: 12 m² per litre

Gloss @ 60°/3 day cure: 10

Enamel holdout: 4% Gloss Change

Flame spread (ASTM-84-97A): 5, Class 1

Smoke contribution (ASTM-84-97A): 0, Class 1

Flash Point (ASTM D3278): 12°C

MAX VOC: 500 g/l

Freeze/thaw stable: Yes

LIMITATIONS:

Not recommended for full surface exterior application, floors or decks or surfaces subject to immersion or prolonged contact with water. These limitations are not to be construed as all-inclusive.